

# 5V CRIMP 26 GA. LOAD TABLE OVER 1x4 WOOD PURLINS

# GULF COAST

Buildings having a Roof Mean Height  $\leq$  20'-0"; Roof Slope: 3"/12" -6"/12" Gable Roof  
Wind Speeds 110-140 mph, Exp C, I = 1.0, based on FLORIDA BUILDING CODE 2007

5 V CRIMP 26 GA. FASTENER SPACING						
ZONE	FASTENER	SUBSTRATE	WIND SPEED ZONE			
			110	120	130	140
			ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING
ZONE 1	#9-15 x 1-1/2"	1x4 WOOD PURLINS	16"	16"	16"	16"
ZONE 2	#9-15 x 1-1/2"	1x4 WOOD PURLINS	16"	16"	16"	16"
ZONE 3	#9-15 x 1-1/2"	1x4 WOOD PURLINS	16"	16"	16"	16"


1) **PANEL DESCRIPTION:** 5V CRIMP, MIN. 26 GA.,  $\frac{3}{8}$ " RIB, 24" WIDTH.

2) **PANEL FASTENER:** #9-15 x 1-1/2" HWH W/ WASHER.


3) **PANEL ROLLFORMER:** ROLLFORMER CORP.

4) **MAXIMUM ALLOWABLE PANEL UPLIFT PRESSURE:** 149.25 PSF @ 16" O.C. PRESSURE BASED ON UL 580/UL 1897 TESTING BY FORCE ENGINEERING TEST REPORT #117-0053T-05.

5) **PLYWOOD DECKING:** 1x4 WOOD PURLINS OVER MIN. 15/32" THICK PLYWOOD. MUST BE DESIGNED IN ACCORDANCE WITH FBC 2007.



State of Florida  
C.O.A.  
# 26778

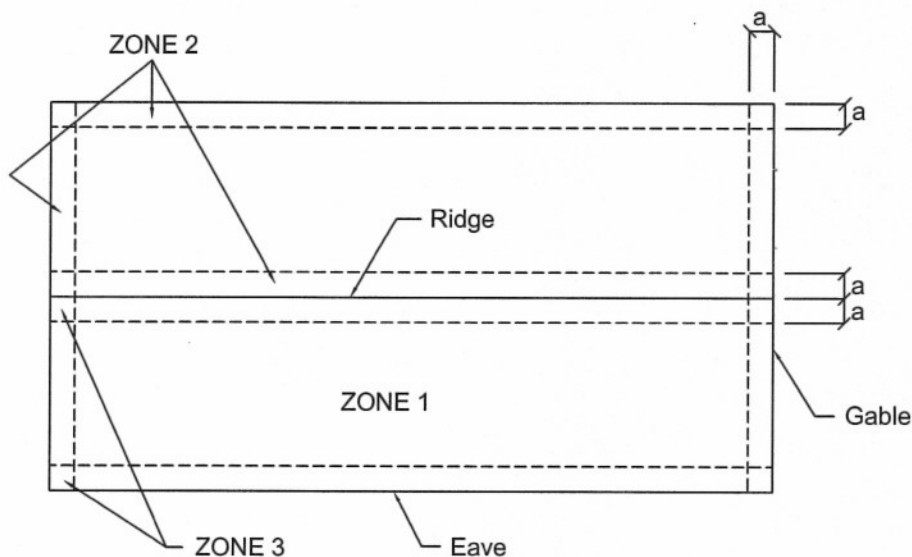

November 8, 2008

Note: Dimension (a) is defined as 10% of the minimum width of the building or 40% of the mean height of the roof, whichever is smaller, however, (a) cannot be less than either 4% of the minimum width of the building or 3 feet.