

26 GA. GULF LOK 16" WIDE LOAD TABLE OVER PLYWOOD



GULF COAST

Buildings having a Roof Mean Height \leq 20'-0"; Roof Slope: 3"/12" - 6"/12" Gable Roof
Wind Speeds 90-100 mph, Exp C, I = 1.0, based on FLORIDA BUILDING CODE 2007

GULF LOK 26 GA. FASTENER SPACING				
ZONE	FASTENER	SUBSTRATE	WIND SPEED ZONE	
			90	100
			ON CENTER SPACING	ON CENTER SPACING
ZONE 1	#10 x 1" TYPE A	15/32" CDX/ 19/32" CDX	5 3/16"	5 3/16"
ZONE 2	#10 x 1" TYPE A	15/32" CDX/ 19/32" CDX	5 3/16"	5 3/16"
ZONE 3	#10 x 1" TYPE A	15/32" CDX/ 19/32" CDX	5 3/16"	5 3/16"

- PANEL DESCRIPTION:** GULF LOK, MIN. 26 GA., 7/8" RIB, 16" MAX WIDTH, SNAP SEAM.
- PANEL FASTENER:** (1) #10-12 x 1" TYPE A PANCAKE HEAD.
- PANEL ROLLFORMER:** NEW TECH MACHINE.
- MAXIMUM ALLOWABLE PANEL UPLIFT PRESSURE:** 63.5 PSF @ 5 3/16" O.C. PRESSURE BASED ON UL 580/UL 1897 TESTING BY FORCE ENGINEERING TEST REPORT #117-0038T-09.
- PLYWOOD DECKING:** MIN. 15/32" THICK, APA RATED PLYWOOD, GRADE C-D, PLYWOOD. MUST BE DESIGNED IN ACCORDANCE WITH FBC 2007.

16" COVERAGE

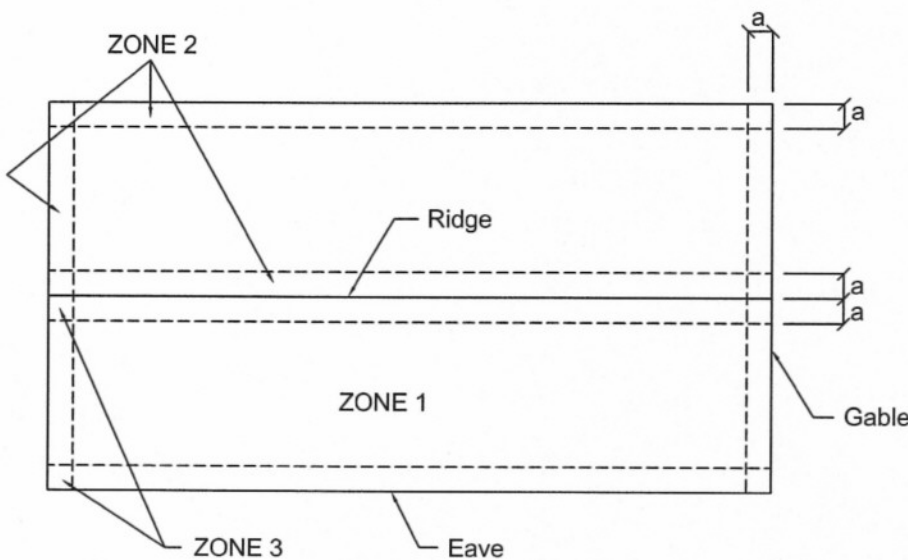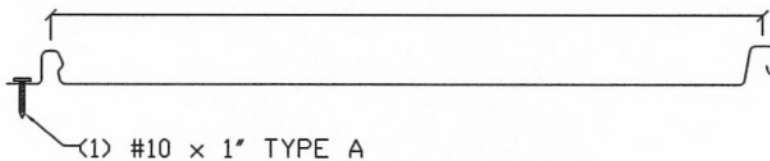

State of Florida
C.O.A.
26778



March 5, 2009

Note: Dimension (a) is defined as 10% of the minimum width of the building or 40% of the mean height of the roof, whichever is smaller, however, (a) cannot be less than either 4% of the minimum width of the building or 3 feet.