




# GULF LOK 24 GA. LOAD TABLE OVER PLYWOOD

# GULF COAST

Buildings having a Roof Mean Height  $\leq 20'-0"$ ; Roof Slope:  $3"/12"$  -  $12"/12"$   
Wind Speeds 110-140 mph, Exp C, I = 1.0, based on FLORIDA BUILDING CODE 2004

GULF LOK 24 GA. FASTENER SPACING						
ZONE	FASTENER	SUBSTRATE	WIND SPEED ZONE			
			110	120	130	140
			ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING
ZONE 1	#10 x 1" TYPE A	15/32" CDX/ 19/32" CDX	10.25"	10.25"	10.25"	10.25"
ZONE 2	#10 x 1" TYPE A	15/32" CDX/ 19/32" CDX	10.25"	10.25"	10.25"	5.125"
ZONE 3	#10 x 1" TYPE A	15/32" CDX/ 19/32" CDX	10.25"	10.25"	10.25"	5.125"

16" COVERAGE

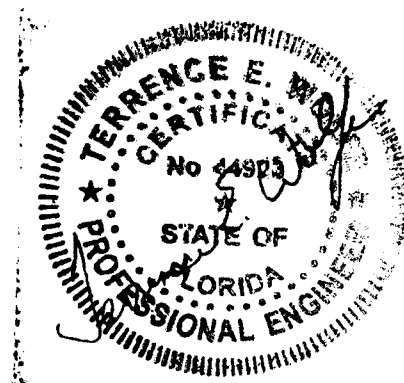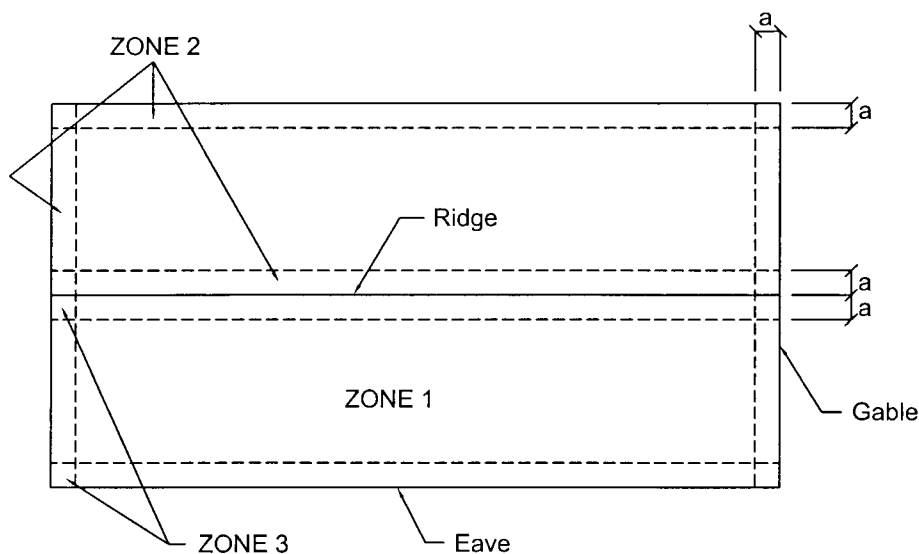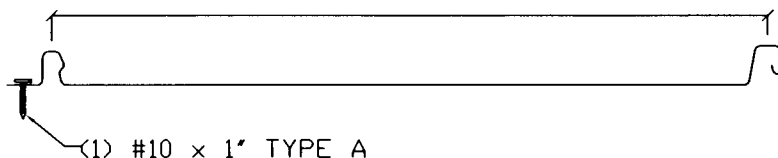

JUL 14 2005

Note: Dimension (a) is defined as 10% of the minimum width of the building or 40% of the mean height of the roof, whichever is smaller, however, (a) cannot be less than either 4% of the minimum width of the building or 3 feet.