



EXPOSED SCREW ROOF SYSTEM




GULFPBR™

PREMIUM METAL ROOFING

TREMENDOUS STRENGTH & WATER TIGHTNESS

With its 36" panel width and exposed fastener application, GulfPBR™ is one of our most economical roofing options.

Bold 1-1/4" high trapezoidal shaped ribs provide tremendous strength making it the panel of choice for structural applications such as large agricultural buildings, while at the same time providing a classy, dimensional look for residential and commercial applications.

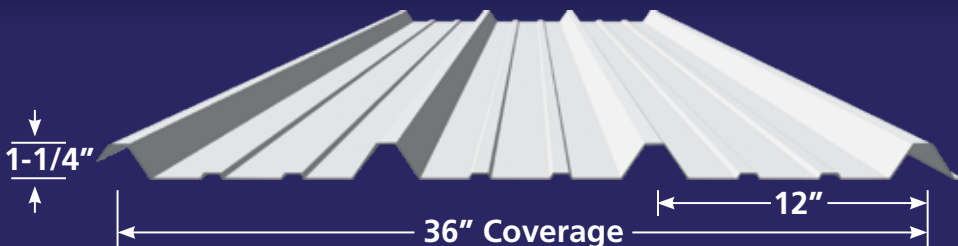

*All measurements are nominal and can vary according to FL Building Code.



ACCESSORY OPTIONS FOR + THE GULFPBR™ SYSTEM

**METAL ROOF COLOR
THAT LASTS!**
www.EverythingElseFades.com

Reflective Foil Insulation

- Reflect up to 97% of Radiant Energy
- Energy Star Compliant
- Save Big on Energy Bill



1x4 Wood Purlins

- Add Structural Stability
- Gain R-Value w/ Energy Efficient Air Space
- Install Directly Over Existing Roof



Long-Life Screws

Upgrade to UltiMate® woodgrip fasteners with a zinc alloy cap.

Weather-Armor® HT³ Underlayment

- 100% Waterproof and Nail Sealable
- UL Classified for Protection Against Fire Damage
- Maximum Flexibility and Longevity



Vented Ridge System

Maintain cooler attic temperatures effectively reducing energy costs.




Titebond® Metal Roof Sealant

- Exceptional Adhesion
- Permanently Flexible



VELUX® Skylights

Replace traditional skylights with energy efficient metal roof skylights.



Closure Foam

Snug fitting foam fills the gap to prevent insect and moisture intrusion.



Color Match Pipe Boots

Seal unsightly roof penetrations. • Ask about color selection



GULFPBR™

PROFILE SPECIFICATIONS

Colors: 40+ Colors & Mill Finish Available

Coverage: 36" Net Coverage

Material: 26 & 24 Gauge Steel

Substrate/ Warranty: AZ-50 / 35/30 Year Premium Paint Finish Warranty
AZ-50 / 40/30 Year Standard Paint Finish Warranty
AZ-55 / 25 Year Unpainted Mill Finish Warranty

Approvals: FL Product Approvals: FL33818.1 (HVHZ)
FL33818.2 (Non-HVHZ), FL34538.1 (Open Framing)

Min. Slope: 3:12 FOR APPLICATIONS ON LOWER SLOPES, CONTACT MANUFACTURER

Substructure: 15/32" (min.) Plywood, 1"x4" SYP Purlins on Plywood or 16 Gauge (min.) Open Steel Framing



METAL ROOFING PRODUCTS



1.888.393.0335

www.GulfCoastSupply.com