


Available in 29ga steel.



Barn Red SMP
SR .32 TE .834 SRI 31.8

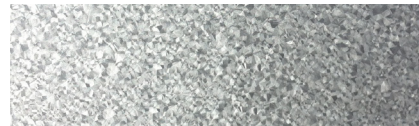

Mill Finish
Unpainted Finish
SR .69 TE .06 SRI 55



Black SMP
SR .27 TE .834 SRI 25.1



Bronze SMP
SR .33 TE .834 SRI 33.1



Charcoal Gray SMP
SR .29 TE .84 SRI 27.8



Clay SMP
SR .37 TE .834 SRI 38.5



Forest Green SMP
SR .22 TE .834 SRI 18.5



Light Gray SMP
SR .37 TE .834 SRI 38.5



Polar White SMP
SR .63 TE .84 SRI 74.2

Color	Reflectivity	Emissivity	SRI
Barn Red	0.32	0.834	31.8
Black	0.27	0.834	25.1
Bronze	0.33	0.834	33.1
Charcoal Gray	0.29	0.84	27.8
Clay	0.37	0.834	38.5
Forest Green	0.22	0.834	18.5
Light Gray	0.37	0.834	38.5
Polar White	0.63	0.84	74.2
Mill Finish	0.69	0.06	55

SR - SOLAR REFLECTIVITY

% of sun's rays reflected from roof

TE - THERMAL EMISSIVITY

% of heat loss from roof surface

SRI - SOLAR REFLECTANCE INDEX


overall performance rating

GULFRIB™



EXPOSED SCREWS

Durability, strength and ease of installation make this exposed fastener panel a top choice for many residential and agricultural applications.

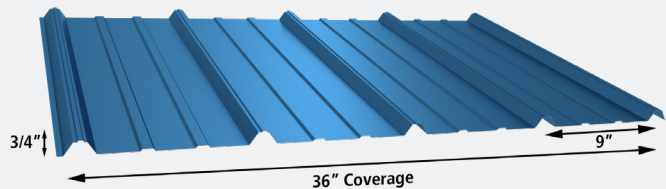

**All measurements are nominal and can vary according to FL Building Code.*

Color selection subject to availability.

Actual colors on this brochure and your computer monitor may vary slightly from color chart. Color differences shown are for illustrative purposes only.

Request a metal sample to view exact color.